

Specifications*

- 13" Laminating Width
- Laminates from 1.5 - 10 mil at 8.8 fpm
- Temperature conversion (C/F)
- Mounts up to 1/4" • 1" and 3" Core Size
- "J"-bar sliding bottom mandrel
- Run/Stop Switch with reverse function
- Safety Sensor on tray and shield
- Decurling Bar for 1-side lamination
- 2 Built-in Trimmers • Cooling fans
- Shipping Dimensions 34" x 24" x 18"
- Net Wt. 104 lbs. • Gross Wt. 114 lbs.
- 115V/60Hz/1600W • UL Approved

VERSALAM1300
1 & 2 Side
13" Thermal Laminator



Stand included

TCC1400i
2 Side 14" Thermal Laminator



Film sold separately

Specifications*

- 14" Laminating Width
- Laminates from 1.5 - 10 mil at 8.8 fpm
- Temperature conversion (C/F)
- Mounts up to 1/4"
- 1" Core Size
- "J"-bar sliding bottom mandrel
- Run/Stop Switch with reverse function
- Built-in trimmer
- Shipping Dimensions 34" x 19" x 18"
- Net Wt. 50 lbs. • Gross Wt. 59 lbs.
- 115V/60Hz/1600W • UL Approved

Specifications*

- 27" Laminating Width
- Laminates from 1.5 - 10 mil at 4.0 fpm
- Temperature conversion (C/F)
- Mounts up to 3/16" • 1 and 3" Core Size
- Run/Stop Switch with reverse function
- 2 Built-in trimmers
- Safety shield • Cooling fans
- Shipping Dimensions 51" x 27" x 24"
- Net Wt. 146 lbs. • Gross Wt. 213 lbs.
- 115V/60Hz/1600W • UL Approved

VERSALAM2700P
1 & 2 Side
27" Thermal Laminator



Stand included

* 1 Year Warranty

Specifications*

- 27" Laminating Width
- Laminates from 1.5 - 10 mil at 8.8 fpm
- Temperature conversion (C/F)
- Mounts up to 1/4" • 1" and 3" Core Size
- Take up bar for cold lamination
- "J"-bar sliding bottom mandrel • Auto shutoff feature
- Run/Stop Switch with reverse function
- Safety Sensor on tray and shield • Bottom roller On/Off switch
- Decurling bar for 1-side Lamination
- 2 Built-in Trimmers • Cooling Fans • Shipping Dimensions 51" x 27" x 24"
- Net Wt. 153 lbs. • Gross Wt. 219 lbs. • 115V/60Hz/1600W
- UL Approved

VERSALAM2700 HC
1 & 2 Side 27"
Hot & Cold Laminator



*Stand included
Film sold separately*

VERSALAM2700-EP

1 & 2 Side
27" Thermal
Laminator



Stand included


Specifications*

- 27" Laminating Width
- Laminates from 1.5 - 10 mil at 8.8 fpm
- Temperature conversion (C/F)
- Mounts up to 1/4" • 1" & 3" Core Size
- "J"-bar sliding bottom mandrel
- Run/Stop switch with reverse function
- Safety sensor on tray and shield
- Bottom roller On/Off switch • Auto shut-off feature
- De-curling bar for 1-side lamination
- 2 Built-in trimmers • Cooling fans
- Shipping Dimensions 51" x 27" x 24"
- Net Wt. 146 lbs. • Gross Wt. 213 lbs. • UL Approved

Specifications*

- 27" Laminating Width
- Laminates from 1.5 - 10 mil at 40 fpm
- Temperature conversion (C/F)
- Mounts up to 1/4" • 1" Core Size
- Run/Stop switch with reverse function
- 2 Built-in trimmers
- Shipping Dimensions 48" x 19" x 18"
- Net Wt. 97 lbs. • Gross Wt. 114 lbs.
- 115V/60Hz/1600W • UL Approved

TCC2700i
2 Side 27" Thermal Laminator

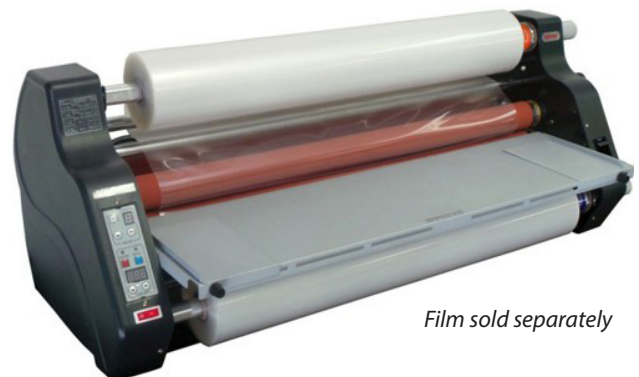

Film sold separately


* 1 Year Warranty

Specifications*

- 27" Laminating Width
- Laminates from 1.5 - 10 mil at 8.8 fpm
- Temperature conversion (C/F)
- Mounts up to 1/4" • 1" Core Size
- "J"-bar sliding bottom mandrel
- Safety sensor on tray and shield
- Auto shutoff feature
- Bottom roller On/Off switch
- Run/Stop Switch with reverse function
- 2 Built-in trimmers • Cooling Fans
- Shipping Dimensions 48" x 19" x 18" • UL Approved
- Net Wt. 97 lbs. • Gross Wt. 114 lbs. • 115V/60Hz/1600W

TCC2700-XM

2 Side 27" Thermal Laminator

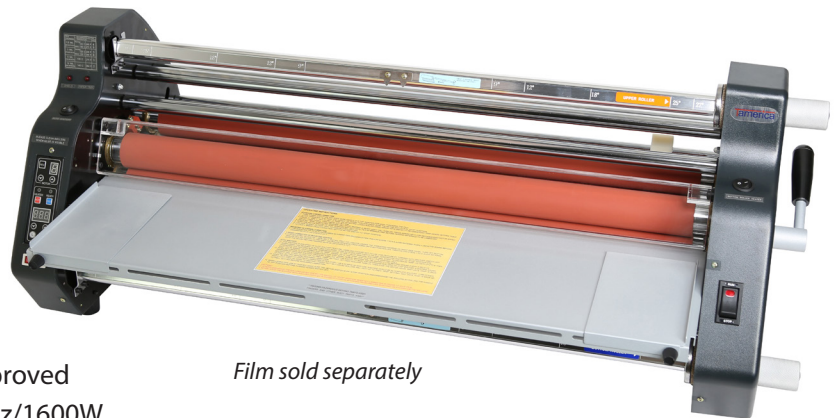

Film sold separately

TCC655Q

2 Side 25" Thermal Laminator



Film sold separately


Specifications*

- 25" Laminating Width
- Laminates from 1.5 - 10 mil at 5.0 fpm
- Mounts up to 3/16"
- 1" Core Size
- "J"-bar sliding bottom mandrel
- Run/Stop switch with reverse function
- Built-in trimmer
- Safety sensor on tray (w/lock) and shield
- Shipping Dimensions 35" x 18 x 11"
- Net Wt. 149 lbs.
- Gross Wt. 154 lbs.
- UL Approved

Specifications*

- 27" Laminating Width
- Laminates from 1.5 - 10 mil at 5.5 fpm
- Temperature conversion (C/F)
- Mounts up to 1/4"
- 1" Core Size
- "J"-bar sliding bottom mandrel
- Pre-set laminating settings
- Built-in trimmer
- Shipping Dimensions 48" x 19" x 18"
- Net Wt. 75 lbs. • Gross Wt. 88 lbs.
- 115V/60Hz/1600W • UL Approved

TSL2700
2 Side 27" Thermal Laminator

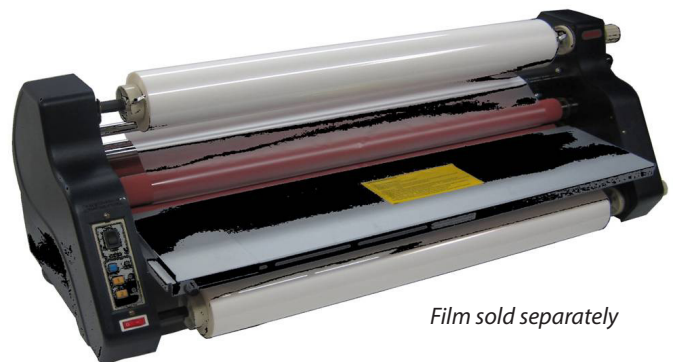

Film sold separately

* 1 Year Warranty

Specifications*

- 45" Laminating Width
- Laminates from 1.5 - 10 mil at 4.0 fpm
- Temperature conversion (C/F)
- Mounts up to 9/16" • 1" & 3" Core Size
- Take up bar for cold lamination
- "J"-bar sliding bottom mandrel
- Run/Stop Switch with reverse function
- Safety sensor on tray and shield
- Auto shutoff feature
- Bottom roller On/Off switch
- 2 Built-in trimmers • Cooling fans
- Emergency stop knob
- Shipping Dimensions 66" x 27" x 52"
- Net Wt. 370 lbs. • Gross Wt. 529 lbs.
- 220V/50Hz/300W
- UL Pending

TCC1200

1 & 2 Side 45" Hot & Cold Laminator



*Stand included
Film sold separately*

TCC1655-HC

1 & 2 Side 65" Hot & Cold Laminator



Specifications*

- 65" Laminating Width
- Laminates from 1.5 - 10 mil at 10.0 fpm
- Mounts up to 1/2"
- Take up bar for cold lamination
- 1" | 2.25" | 3" Core Size
- Run/Stop switch with reverse function
- Safety sensor on tray and shield
- Bottom roller On/Off switch
- 3 Built-in trimmers
- Cooling fans
- Emergency stop knob
- Shipping Dimensions 83" x 27 x 34"
- Net Wt. 479 lbs.
- Gross Wt. 529 lbs.
- 220V/50Hz/300W

* 1 Year Warranty