

RSL-2702S Thermal Laminator



Encapsulate, laminate and mount with the dual hot and cold tabletop thermal laminator



Highlights

- **Quality Silicon Rollers** – Providing consistent heat distribution across nip
- **Independent Heaters** – Program up to 9 settings for top and bottom roller temperature
- **Release Liner Take-up** – Included as a standard option for cold and heat assist lamination
- **Convenient Features** – Digital controls, quick notch gap adjustment, and rear cross cutter
- **Operator Protection** – Safety shield designed to keep operators hands away from the hot rollers


RSL-2702S Thermal Laminator



**HOT & COLD
LAMINATION**

**SPEEDS UP TO
8.5 FT./MIN.**

**CONVENIENT
FEATURES**

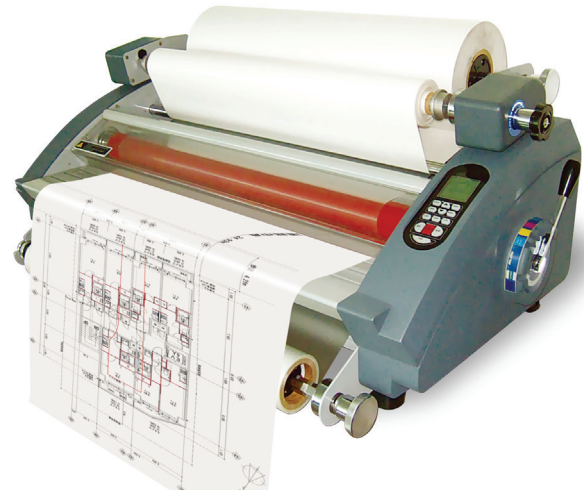

HIGHLIGHTS

Maximum Width	27" (685 mm)
Maximum Speed	8.5 ft./min. (2.5 m./min.)
Maximum Temperature	302°F (150°C)
Mounting	Up to 6/25" (6 mm)
Gap Adjustment	Quick Notch
Reverse	Yes
Table	Removable
Emergency Stops	Yes
De-Curler Bar	Yes
Release Liner Take Up	Yes
Rear Cross Cutter	Yes
Shaft Size	3" Auto-Grips

DIMENSIONS & WEIGHT

Dimensions (WxDxH)	38" x 22" x 19"
Weight	154 lbs.
Carton Dimensions (WxDxH)	45" x 24" x 24"
Cartoon Weight	176 lbs.
UPC Code	8 49023 07039 9

**Warranty
Parts & Labor 1 Year**